


AI 4CH PoE Switch

The 4-port 10/100Mbps unmanaged PoE switch provides seamless data connectivity for 10/100Mbps Ethernet and PoE power for powered devices such as network surveillance cameras and wireless (AP)

CF-SWP-2504

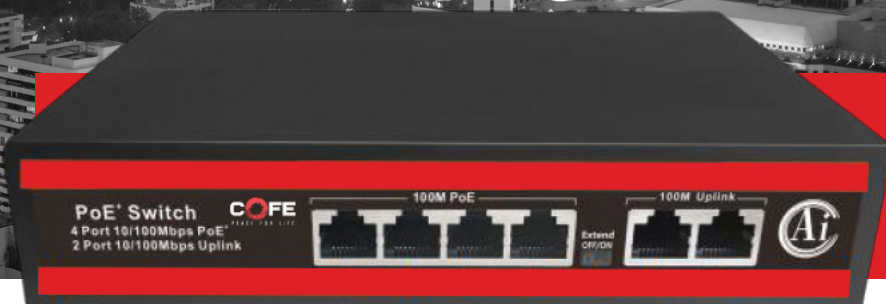

Watchdog
Support



CAT-6 Standard
Network Cable



Switching
Capacity



Working
Temperature



Plug and
Play



Support Up-To 250mtr
Transmission Distance



Power
Consumption



Support Restrain
Network Storm
VLAN Function



Support Lightning
Protection



AI Support

Specification

Power	
Power Adapter Voltage	AC 110V-240V
Consumption	65W (52V1.44A)
Network Connector	
Network Port	PoE Ethernet Port- 1~4 Port:10/100Mbps Ethernet Port- Uplink Port:10/100Mbps
Transmission Distance	Watchdog- 1~4 Port 1~4 Port: 100Mbps: 0~100m: 10Mbps: 0~250m;
Transmission Medium	Uplink Port: 0~100m Cat5 / 5e / 6 Standard Network Cable
Network Switch	
Network Standard	IEEE802.3/802.3u, IEEE802.3x, IEEE802.ab
Switching Capacity	1.6Gbps
Packet Buffer Memory	1 Mbits
Throughput	0.8928Mpps
MAC Table	1K
Packet Forwarding Rate	10Mbps:14880pps/port 100Mbps:148800pps/port
Power Over Ethernet	
PoE Standard	IEEE802.3af/at
PoE Power Supply	12+, 36-: 4 Core Power Supply
PoE Power	af=15.4W,at=30W for each Port
RJ45 Port	
Port Function	1-6 ports 10/100BaseT(X) auto-detect, Full/half duplex MDI/MDI-Xadaptive
Forwarding mode	Store-and-forward (full wire speed)
LED Indicator	
LED Indicator	Power indicator: PWR (green); Network indicator: Link (yellow); POEworking indicator: PoE (green); Function switch indicator: EXTEND(green)

General

Working Temperature	0°C ~ 55°C
Relative Humidity	20 ~ 95%
Storage Temperature	-20°C ~ 70°C
Color	Black